

General Product Information:

ROXUL® products are mineral wool fibre insulations made from basalt rock and slag. This combination results in a non-combustible product with a melting point of approximately 2150°F (1177°C), which gives it excellent fire resistance properties. ROXUL mineral wool is a water repellent yet vapour permeable material.

Description & Common Applications:

The RockBoard™40 product is a semi-rigid mineral wool insulation board that is non-combustible, water repellent, fire resistant and sound absorbent. This product is a general all purpose board with low thermal conductivity. This board can also be fabricated to different dimensions while still retaining fire, water and thermal properties.

Compliance and Performance:

ASTM C 612	Mineral Fiber Block and Board Thermal Insulation	Type IVA, Complies
------------	--	--------------------

Fire Performance:

ASTM E 136	Behaviour of Materials at 750°C (1382°F)	Non-Combustible
CAN4 S114	Test for Non-Combustibility	Non-Combustible
ASTM E 84(UL 723)	Surface Burning Characteristics	Flame Spread = 5
		Smoke Developed = 5
CAN/ULC S102	Surface Burning Characteristics	Smoke Developed = 10

Maximum Service Temperature:

ASTM C 411	Hot Surface Performance	In Compliance with ASTM C612 @ 1200°F(650°C)
------------	-------------------------	---

Dimensional Stability:

ASTM C 356	Linear Shrinkage	0.47% @ 1200°F (650°C)
------------	------------------	------------------------

Moisture Resistance:

ASTM C 1104	Moisture Sorption	0.03%
-------------	-------------------	-------

Fungi Resistance

ASTM C1338	Determination of Fungi Resistance	Passed
------------	-----------------------------------	--------

Thermal Resistance:

ASTM C 518 (C 177)	R-value/inch @ 75°F	4.1 hr.ft².F/Btu***
	RSI value/25.4 mm @ 24°C	0.72 m²K/W



Corrosive Resistance:

ASTM C 665	Corrosiveness to Steel	Pass
ASTM C 795 ****	Stainless Steel Stress Corrosion Specification as per Test Methods C871 and C692: U.S. Nuclear Regulatory Commission, Reg. Guide #1.36: U.S. Military Specifications MIL-I-24244 (all versions including B and C)	Conforms

*MASTER FORMAT 1995 EDITION **MASTER FORMAT 2004 EDITION

*** at the time of manufacturing

Thermal Conductivity (k):

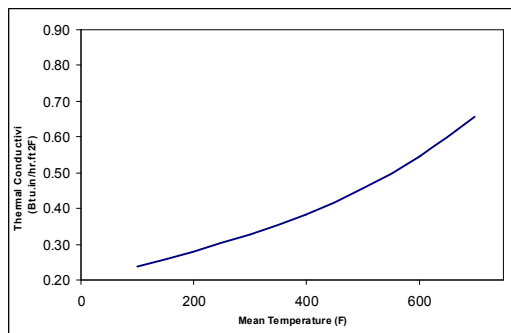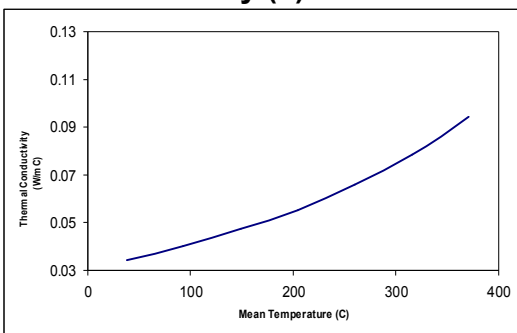

Acoustical Performance

ASTM C423 CO-EFFICIENTS AT FREQUENCIES

Thickness	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
1.0"	0.07	0.32	0.77	1.04	1.05	1.05	0.80
1.5"	0.18	0.48	0.96	1.09	1.05	1.05	0.90
2.0"	0.26	0.68	1.12	1.10	1.03	1.04	1.00
3.0"	0.63	0.95	1.14	1.01	1.03	1.04	1.05
4.0"	1.03	1.07	1.12	1.04	1.07	1.08	1.10

Air Erosion:

UL 181 Maximum Air Velocity 1000 fpm (5.08 m/s)

Compressive Strength:

ASTM C 165 at 10% 90 psf (4.3 kPa)
at 25% 226 psf (10.8 kPa)

Density:

ASTM C 612-00 – Actual 4.0 lbs/ft³ 64 kg/m³

Dimensions:

24" (width) x 48" (length)
610 mm (width) x 1219 mm (length)

Thickness:

Product is available in 1" through 4" in half inch increments as well as 5" offering.
For additional sizes, please contact our customer service representatives.

Key Application Qualifiers:

- Water repellent
- Durability
- Ease of application
- Fire resistance
- Excellent thermal resistance
- Low moisture sorption
- Non-corrosive
- Chemically inert
- CFC and HCFC free product and process
- Made from natural & recycled materials

Other ROXUL Products:

Please consult ROXUL for all your insulation needs. We have an extensive range of products for all applications from pipe insulation to commercial products to residential batts. ROXUL invites all inquiries and will act promptly to service all of your requirements.

Facing:

This product can be faced with reinforced foil facing. Please note that the facings will influence the product's service temperature range

*** "Provisions for lot testing may be required, consult manufacturer."

Note:

As ROXUL Inc. has no control over installation design and workmanship, accessory materials or application conditions, ROXUL Inc. does not warranty the performance or results of any installation containing ROXUL Inc's. products. ROXUL Inc's. overall liability and the remedies available are limited by the general terms and conditions of sale. This warranty is in lieu of all other warranties and conditions expressed or implied, including the warranties of merchantability and fitness for a particular purpose.